



## STB-HDM2000 FIRMWARE

### Instructions for flashing the firmware


Create a folder in the root of a freshly formatted, empty flash drive called “upgrade”

Copy the included file [NEC\_EMMA3SLHD.UPG] to the folder “upgrade’ on the flash drive.


Turn the STB-HDM2000 Set top box on and plug the flash drive in to the USB port on the front of the set top box.

Press the “menu” button on the remote to bring up the set top box system menu

Using the down button select the “Installation” option and click on “OK” button.

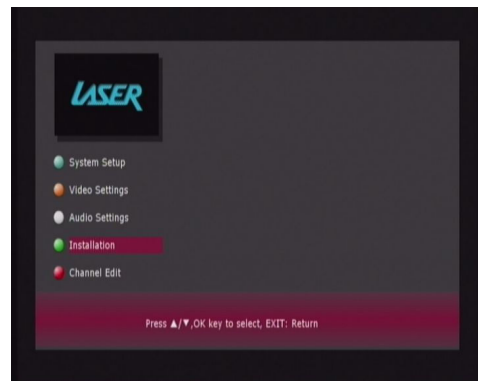


Use the down arrow to select “Upgrade STB” and press the “OK” button.

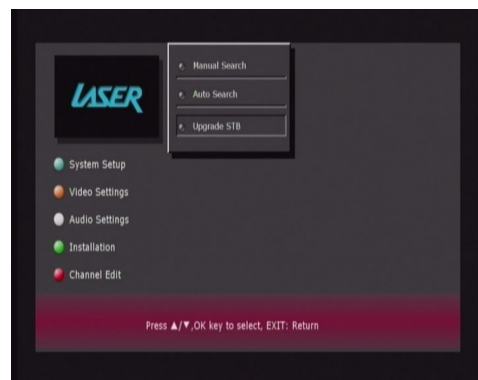


The message “Read Upgrade File” will be displayed during the upgrade process.

Do not switch the STB-HDM2000 off at this time or it may be rendered unusable.

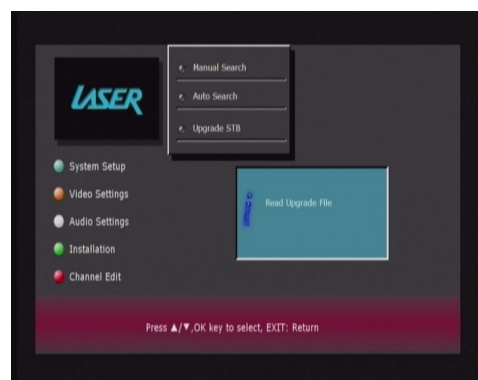


When the update process has been completed you will see the first “Installation Screen”.

Before Completing the rescan please press the “Exit” button on the remote and then the Menu Button.

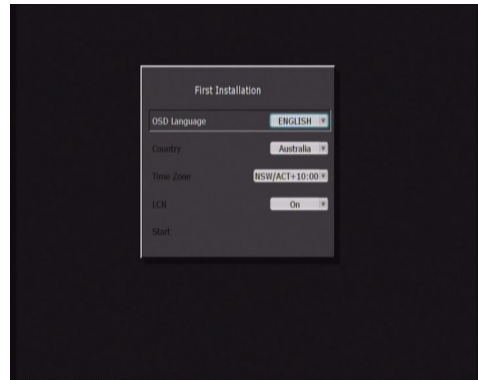

Select “System Setup” on the main menu and then “Factory Reset”.

This will ensure that all setting that may be still stored in the memory is removed before setting the STB up again.

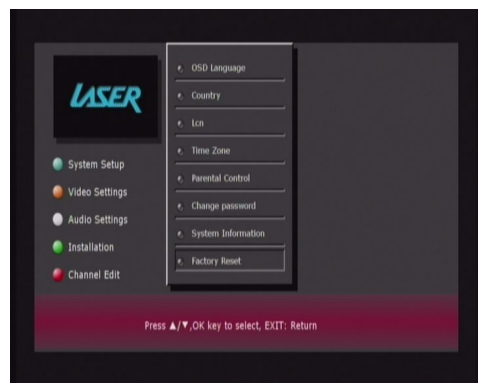


Press the “OK” button to confirm the reset.

When completed the “First Installation” screen will be displayed.

Please turn the STB-HDM2000 OFF using the MAIN POWER switch on the rear of the device.

After about 30 second the STB can be turned back on again.

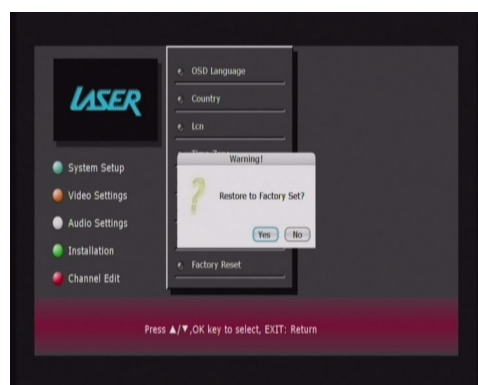

When the STB has restarted and the update process has been completed you will be required to rescan for channels.

